

an**650**

Features:

- High production performance (OEE >95%).
- Full customer service along machine life.
- Main motion servomotorized.
- High filling accuracy controlled from HMI.
- Easy access for sealing system cleaning. Tool-free.
- Gas flushing.
- Low maintenance.
- Independent lane rejection (reject/sampling), fail safe mode.
- GMP Compliance.
- Oxygen residual analyzer.
- Independent temperature calibration of each sealing jaw from touch screen.
- Remote diagnosis via ethernet.
- Total hermetic and monobloc machine.
- Stickpack length automatically adjustable.
- CIP and/or SIP procedures.
- HMI for multiple recipes.
- Transfer systems to secondary packaging equipment.
- Empty stick detector.
- Nozzle independent movement + shut-off valves.
- Programmable string option.
- Centralized lubrication.
- Unwinder with safety lock doors.
- Automatic reel alignment.
- Expansible reel shaft.

Additional features:

- Laser/Thermoprinter/Inkjet/Thermotransfer.
- Vacuum/auger/elevator feeding systems.
- Non-stop automatic reel splicer.
- Anti-static bar.
- UV lamp.

Stickpack type:

- Lap seal.
- Fin seal.
- Shaped stick.
- Twinpack.
- 3 sides seal.
- Side seal.

Filling system:

- Volumetric filler.
- Auger filler.
- Piston pumps.
- Flowmeter.
- Timing filler.
- Counting filler.

an**650**

**High speed
production**

High speed stickpack multilane machine **up to 16 lanes.**

_Our equipment

aranow
packaging
machinery



Josep Tura 11-f, Poligon Industrial Mas d'en Cisa
E-08181 Sentmenat, BARCELONA – Catalonia
Tel: +34 937 154 676
Fax: +34 937 154 677
www.aranow.com



Catalonia
Packaging machinery manufacturers

aranow
packaging
machinery

Stickpack

an**650**

High speed stickpack multilane machine **up to 16 lanes**.

Downtimes reduction
due to **user friendly**
and simple design,
low maintenance and
easy access.

Optimal
implementation
& performance

Personalized
Customer Service
support with local
technicians.

Overall Equipment
Efficiency (OEE) > 95%

CONCEPT

Max. reel width

Lanes number

Stickpack width range

Max. stickpack length

Reel shaft

ø Reel max.

Max. production

Standard power consumption

Standard air consumption (l./min)

DATA

650 mm

4 - 16 lanes

17 - 80 mm

180 mm*

70 mm

450 mm

1.200 spm


5 kw

220 l.

* Other dimensions under request.



1. Dust exhaust system.

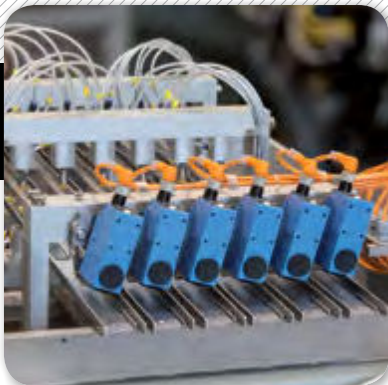

2. Photocell.




3. Forming tube assembly.



1. Liquid.



2. Powder.

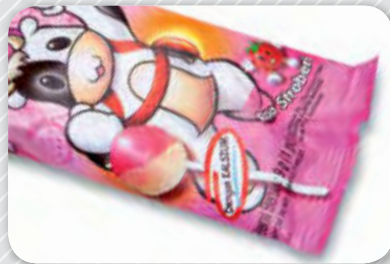

3. Pieces.



4. Shaped Stick.



5. Twinpack.



6. Granulate.