



# fs1000

## Features:

- High production performance (OEE >95%).
- Full customer service along machine life.
- Easy access for sealing system cleaning. Tool-free.
- Low maintenance.
- Main motion servomotorized.
- Long life lubrication.
- High filling accuracy controlled from HMI.
- Gas flushing.
- GMP Compliance.
- Oxygen residual analyzer.
- Remote diagnosis via ethernet.
- Independent temperature calibration of each sealing jaw from touch screen.
- CIP and/or SIP procedures.
- Transfer systems to secondary packaging equipment.
- HMI for multiple recipes.
- Automatic reel alignment.
- Expansible reel shaft.
- Possibility to have 1 or 2 tear notch on same sachet.
- Easy format change.

## Additional features:

- Laser/Thermoprinter/Inkjet/Thermotransfer.
- Vacuum/auger/elevator feeding systems.
- Non-stop automatic reel splicer.
- Anti-static bar.
- UV lamp.

## Filling system:

- Volumetric filler.
- Auger filler.
- Piston pumps.
- Flowmeter.
- Timing filler.
- Counting filler.

# fs1000

## Flat sachet

Flat sachet multilane machine **up to 14 lanes.**

\_Our equipment

**aranow**  
packaging  
machinery



Josep Tura 11-f, Poligon Industrial Mas d'en Cisa  
E-08181 Sentmenat, BARCELONA – Catalonia  
Tel: +34 937 154 676  
Fax: +34 937 154 677  
[www.aranow.com](http://www.aranow.com)



Catalonia  
Packaging machinery manufacturers

**aranow**  
packaging  
machinery



# Flat Sachet

fs1000

Flat sachet multilane machine **up to 14 lanes**.

**Downtimes reduction**  
due to **user friendly**  
**and simple design**,  
low maintenance and  
easy access.

**Optimal**  
implementation  
& performance

**Personalized**  
**Customer Service**  
support with local  
technicians.

**Overall Equipment**  
**Efficiency (OEE) > 95%**

## CONCEPT

Max. reel width

Lanes number

Flat sachet width range

Max. flat sachet length

Reel shaft

ø Reel max.

Max. production

Standard power consumption

Standard air consumption (l./min)

## DATA

1.000 mm

3 - 14 lanes

25 - 150 mm

150 mm\*

150 mm\*

500 mm

1.050 spm


5 kw

180 l.

\* Other dimensions under request.



1. Shut-off nozzles.

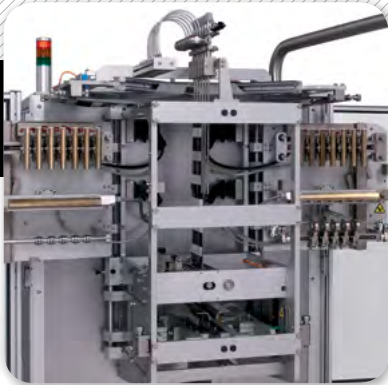

2. Side opening.



3. Easy format changing.



Powder, liquid in 4 side sealing.